26.600 G

OEM Pressure Transmitter Standard

Applications

- mechanical and plant engineering
- general industrial applications

Characteristics

- ceramic sensor
- accuracy 0.5 % FSO according to IEC 60770
- nominal pressure ranges from 0 … 1 bar up to 0 … 400 bar
- option: oil and grease free version

Technical Data

Input pressure range																
Nominal pressure gauge	[bar]	-1…0 [1]	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400
Nominal pressure abs.	[bar]	-	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400
Overpressure	[bar]	3	3	5	5	12	12	20	50	50	120	120	200	400	400	650
Burst pressure ≥	[bar]	4	4	7	7,5	15	18	30	70	75	150	180	300	500	750	1000
Vacuum resistance		unlimited														

[1] *for this pressure range accuracy is ≤ 1 % FSO IEC 60770*

Output signal / Supply			
Standard	2-wire:	4 ... 20 mA	/ V_S = 8 ... 32 V_{DC}
Options	3-wire:	0 ... 10 V	/ V_S = 14 ... 30 V_{DC}
	3-wire ratiometric:	10 … 90% of V	/ V_S = 2.7 … 5 V_{DC}
Performance			
Accuracy [2]	≤ ± 0.5 % FSO		
Permissible load	2-wire: $R_{max} = [(V_S - V_{S\,min}) / 0.02\ A]\ \Omega$		3-wire: R_{min} = 10 kΩ
Influence effects	supply: 0.05 % FSO / 10 V		load: 0.05 % FSO / kΩ
Response time	2-wire: ≤ 10 msec		3-wire: ≤ 3 msec
Long term stability	≤ ± 0.3 % FSO / year at reference conditions		
Measuring rate	1 kHz		

[2] *accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)*

Thermal effects (Offset and Span) / Permissible temperatures			
Thermal error	≤ ± 0.3 % FSO / 10 K	in compensated range:	-25 ... 85 °C
Permissible temperatures	medium: -25 ... 125 °C	electronics / environment: -25 ... 85 °C	storage: -40 ... 85 °C
Electrical protection			
Short-circuit protection	permanent	3-wire ratiometric: none	
Reverse polarity protection	no damage, but also no function		
Electromagnetic protection	emission and immunity according to EN 61326		
Mechanical stability			
Vibration	10 g, 25 Hz … 2 kHz	according to DIN EN 60068-2-6	
Shock	500 g / 1 msec	according to DIN EN 60068-2-27	

Materials	
Pressure port / housing	stainless steel 1.4301 (304)
Seals (media wetted)	FKM others on request
Diaphragm	ceramics Al_2O_3 96 %
Media wetted parts	pressure port, seals, diaphragm
Miscellaneous	
Option oxygen application	for $P_N \leq 15$ bar: O-ring in 70 EPDM 281 (with BAM-approval); permissible maximum values are 15 bar / 60° C and 10 bar / 90° C for $P_N \leq 25$ bar: O-ring in FKM Vi 567 (with BAM-approval); permissible maximum values are 25 bar / 150° C
Weight	approx. 120 g
Current consumption	2-wire: max. 25 mA 3-wire ratiometric: typ. 1.5 mA 3-wire voltage: max. 7 mA (short circuit current: max. 20 mA)
Operational life	> 100 x 10^6 cycles
CE-conformity	EMC Directive: 2004/108/EC Pressure Equipment Directive: 97/23/EC (module A) [3]

[3] This directive is only valid for devices with maximum permissible overpressure > 200 bar

Wiring diagrams

2-wire-system (current)



3-wire-system (voltage)



Pin configuration

Electrical connection	ISO 4400	Micro (contact distance 9.4 mm)	M12x1 (4-pin), plastic	cable colours (DIN 47100)
Supply +	1	1	1	wh (white)
Supply –	2	2	2	bn (brown)
Signal + (for 3-wire)	3	3	3	gn (green)
Shield	ground pin	ground pin	4	ye/gn (yellow / green)

Electrical connections (dimensions in mm)

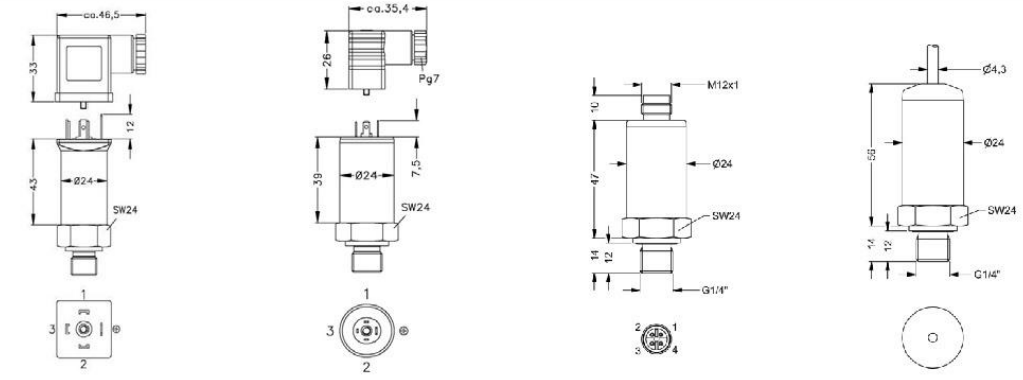

ISO 4400 (IP 65) | Micro, contact distance 9.4 mm (IP 65) | M12x1, 4-pin (IP 67) | cable outlet with PVC-cable (IP 67) [4,5]

* pressure range P_N = 400 bar: total length increases by12 mm.

[4] standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)
[5] different cable types and lengths available, permissible temperature depends on kind of cable

Mechanical connection (dimensions in mm)

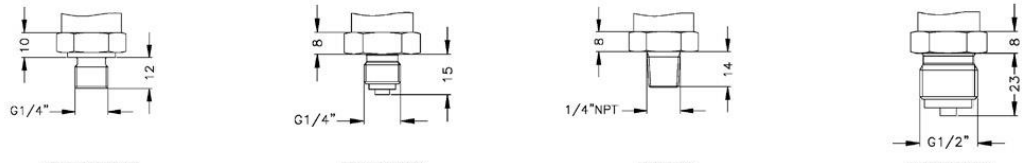

G1/4" DIN 3852 | G1/4" EN 837 | 1/4" NPT | G1/2" EN 837

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

Ordering code 26.600 G

26.600 G - □□□□ - □ - □ - □ - □□□ - □□□ - □ - □□□

Input	[bar]																			
	1.0	1	0	0	1															
	1.6	1	6	0	1															
	2.5	2	5	0	1															
	4.0	4	0	0	1															
	6.0	6	0	0	1															
	10	1	0	0	2															
	16	1	6	0	2															
	25	2	5	0	2															
	40	4	0	0	2															
	60	6	0	0	2															
	100	1	0	0	3															
	160	1	6	0	3															
	250	2	5	0	3															
	400	4	0	0	3															
	-1 … 0 [1]	X	1	0	2															
	customer	9	9	9	9															consult
Pressure																				
	gauge					R														
	absolute					A														
Output																				
	4 … 20 mA / 2-wire						1													
	0 … 10 V / 3-wire						3													
	2.7 ... 5 V / 3-wire ratiometric						R													
	customer						9													consult
Accuracy																				
	0.5 % FSO							5												
	customer							9												consult
Electrical connection																				
	Male and female plug ISO 4400								1	0	0									
	Male and female plug Micro								C	1	0									
	Male plug M12x1 (4-pin), plastic								M	0	0									
	Cable outlet with PVC cable [2]								T	A	0									
	customer								9	9	9									consult
Mechanical connection																				
	G1/4" DIN 3852											3	0	0						
	G1/4" EN 837											4	0	0						
	1/4" NPT											N	4	0						
	G1/2" EN 837											2	0	0						
	customer											9	9	9						consult
Seal																				
	FKM														1					
	EPDM														3					
	customer														9					consult
Special version																				
	standard															0	0	0		
	oxygen application [3]															0	0	7		
	oil and grease free															0	0	8		
	customer															9	9	9		consult

Prices EXW Thierstein, excluding package

[1] for nominal pressure range -1 ... 0 bar accuracy is 1 % FSO
[2] standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)
[3] oxygen application with FKM seal up to 25 bar or with EPDM seal up to 15 bar posible