



DMP 331

Industrial Pressure Transmitter for Low Pressure

Stainless Steel Sensor

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 / 0.1 % FSO

Nominal pressure

from 0 ... 100 mbar up to 0 ... 40 bar

Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V
others on request

Special characteristic

- ▶ perfect thermal behaviour
- ▶ excellent long term stability
- ▶ pressure port
G 1/2" flush from 100 mbar




Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for gases and dusts
- ▶ SIL 2-according to
IEC 61508 / IEC 61511
- ▶ pressure sensor welded
- ▶ customer specific versions

The pressure transmitter DMP 331 can be used in all industrial areas when the medium is compatible with stainless steel 1.4404 (316 L) or 1.4435 (316 L). Additional are different elastomer seals as well as a helium tested welded version available.

The modular concept of the device allows to combine different stainless steel sensors and electronic modules with a variety of electrical and mechanical versions. Thus a diversity of variations is created, meeting almost all requirements in industrial applications.

Preferred areas of use are

-  Plant and Machine Engineering
-  Environmental Engineering
(water - sewage - recycling)
-  Energy Industry



DMP 331

Industrial Pressure Transmitter

Technical Data


Miscellaneous		
Option SIL ³ 2	according to IEC 61508 / IEC 61511	
Current consumption	signal output current: max. 25 mA	signal output voltage: max. 7 mA
Weight	approx. 140 g	
Installation position	any ⁴	
Operational life	> 100 x 10 ⁶ pressure cycles	
CE-conformity	EMC Directive: 2004/108/EC	
ATEX Directive	94/4/EG	

³ only for 4 ... 20 mA / 2-wire, not in combination with the accuracy 0.1%


⁴ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $P_N \leq 1$ bar.

Wiring diagrams

2-wire-system (current)



3-wire-system (current / voltage)





Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	field housing	cable colours (DIN 47100)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal + (for 3-wire)	3	1	3	OUT+	gn (green)
Shield	ground pin	5	4	⏏	ye/gn (yellow / green)



Electrical connections (dimensions in mm)

standard




ISO 4400 (IP 65)


option




Binder Series 723 5-pin (IP 67)




M12x1 4-pin (IP 67)



cable outlet with PVC cable (IP 67)⁵



compact field housing (IP 67)



cable outlet, cable with ventilation tube (IP 68)⁶

⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request

⁵ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)

⁶ different cable types and lengths available, permissible temperature depends on kind of cable


DMP 331

Industrial Pressure Transmitter

Technical Data


Mechanical connections (dimensions in mm)

standard for accuracy 0.35 / 0.25 %

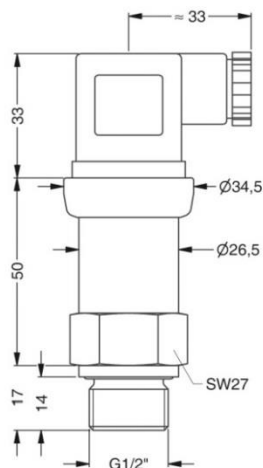


G1/2" DIN 3852
with ISO 4400

standard for accuracy 0.1 % ;
SIL- and SIL-IS-version

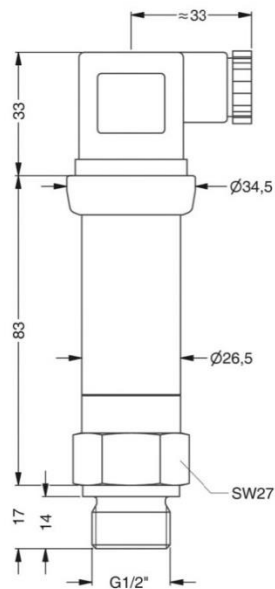


G1/2" DIN 3852
with ISO 4400


option




G1/2" EN 837




G1/2" open port




G1/2" DIN 3852
with flush sensor




G1/4" DIN 3852



G1/4" EN 837



1/2" NPT



1/4" NPT

⇒ metric threads and other versions on request

Ordering code DMP 331

			-					-		-		-				-				-		-			
--	--	--	---	--	--	--	--	---	--	---	--	---	--	--	--	---	--	--	--	---	--	---	--	--	--

Pressure							
	gauge absolute	1 1	1 1	0 1			
Input	[bar]						
	0.10	1	0	0	0		
	0.16	1	6	0	0		
	0.25	2	5	0	0		
	0.40	4	0	0	0		
	0.60	6	0	0	0		
	1.0	1	0	0	1		
	1.6	1	6	0	1		
	2.5	2	5	0	1		
	4.0	4	0	0	1		
	6.0	6	0	0	1		
	10	1	0	0	2		
	16	1	6	0	2		
	25	2	5	0	2		
	40	4	0	0	2		
	-1 ... 0	X	1	0	2		
	customer	9	9	9	9		consult
Output							
	4 ... 20 mA / 2-wire				1		
	0 ... 20 mA / 3-wire				2		
	0 ... 10 V / 3-wire				3		
Intrinsic safety	4 ... 20 mA / 2-wire				E		
SIL2	4 ... 20 mA / 2-wire				1S		
	SIL2 with intrinsic safety				ES		
	4 ... 20 mA / 2-wire						
	customer				9		consult
Accuracy							
standard for P _N ≥ 0.4 bar	0.35 %				3		
standard for P _N < 0.4 bar	0.5 %				5		
option 1 for P _N ≥ 0.4 bar	0.25 %				2		
option 2	0.1 % ¹				1		
	customer				9		consult
Electrical connection							
	Male and female plug ISO 4400				1	0	0
	Male plug Binder series 723 (5-pin)				2	0	0
	Cable outlet with PVC cable ²				T	A	0
	Cable outlet ³				T	R	0
	Male plug M12x1 (4-pin) / metal				M	1	0
	Compact field housing						
	stainless steel 1.4305				8	5	0
	customer				9	9	9
Mechanical connection							
	G1/2" DIN 3852				1	0	0
	G1/2" EN 837				2	0	0
	G1/4" DIN 3852				3	0	0
	G1/4" EN 837				4	0	0
	G1/2" DIN 3852						
	with flush sensor				F	0	0
	G1/2" DIN 3852 open pressure port				H	0	0
	1/2" NPT				N	0	0
	1/4" NPT				N	4	0
	customer				9	9	9
Seals							
	FKM					1	
	EPDM					3	
	NBR					5	
	without (welded version) ⁴					2	
	customer					9	
Special version							
	standard					0	0
	customer					9	9
							consult

¹ not in combination with SIL

² standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C), others on request

³ cable with ventilation tube (code TR0 = PVC cable), different cable types and lengths available, price without cable

⁴ welded version only with pressure ports according to EN 837