



## DS 200

### Electronic Pressure Switch

#### Stainless Steel Sensor

accuracy according to IEC 60770:  
standard: 0.35 % FSO  
option: 0.25 % FSO

#### Nominal pressure

from 0 ... 100 mbar up to 0 ... 600 bar

#### Contacts

1, 2 or 4 independent PNP contacts, freely configurable

#### Analogue output

2-wire: 4 ... 20 mA  
3-wire: 4 ... 20 mA / 0 ... 10 V  
others on request

#### Special characteristics

- ▶ indication of measured values on a 4-digit LED display
- ▶ rotatable and configurable display module

#### Optional versions

- ▶ **IS-version**  
**Ex ia = intrinsically safe for gases**
- ▶ pressure sensor welded
- ▶ customer specific versions




The electronic pressure switch DS 200 is the successful combination of

- ▶ intelligent pressure switch
- ▶ digital display

and has been specially designed for numerous applications in various industrial sectors.

As standard the DS 200 offers a PNP contact and a rotatable display module with 4-digit LED display. Optional versions like e.g. an intrinsically safe version, max. 4 contacts and an analogue output complete the profile.

#### Preferred areas of use are

-  Plant and Machine Engineering
-  Heating and Air Conditioning
-  Environmental Engineering  
(water – sewage – recycling)



# DS 200

## Electronic Pressure Switch

## Technical Data

Input pressure range												
Nominal pressure gauge <sup>1</sup> / abs.	[bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6
Level gauge <sup>1</sup>	[mH <sub>2</sub> O]	-	1	1.6	2.5	4	6	10	16	25	40	60
Overpressure	[bar]	5	0.5	1	1	2	5	5	10	10	20	40
Burst pressure ≥	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50

Nominal pressure gauge <sup>1</sup> / abs.	[bar]	10	16	25	40	60	100	160	250	400	600
Level gauge <sup>1</sup>	[mH <sub>2</sub> O]	100	160	250	400	600	-	-	-	-	-
Overpressure	[bar]	40	80	80	105	210	210	600	1000	1000	1000
Burst pressure ≥	[bar]	50	120	120	210	420	420	1000	1250	1250	1250
Vacuum resistance	P <sub>N</sub> ≥ 1 bar: unlimited vacuum resistance; P <sub>N</sub> < 1 bar: on request										
<sup>1</sup> from 60 bar: measurement starts with ambient pressure											

Contact <sup>2</sup>	
Standard	1 PNP contact
Options	2 independent PNP contacts 4 independent PNP contacts (possible with M12x1, 8-pin for 4 ... 20 mA/3-wire; 0 ... 10 V/3-wire on request)
Max. switching current	4 ... 20 mA / 2- and 3-wire: contact rating 125 mA, short-circuit resistant; V <sub>switch</sub> = V <sub>S</sub> - 2V 0 ... 10 V / 3-wire: contact rating 500 mA, short-circuit resistant
Accuracy of contacts <sup>3</sup>	standard: P <sub>N</sub> < 0.4 bar: ≤ ± 0.5 % FSO      P <sub>N</sub> ≥ 0.4 bar: ≤ ± 0.35 % FSO option: P <sub>N</sub> ≥ 0.4 bar: ≤ ± 0.25 % FSO
Repeatability	≤ ± 0.1 % FSO
Switching frequency	max. 10 Hz
Switching cycles	> 100 x 10 <sup>6</sup>
Delay time	0 ... 100 sec

<sup>2</sup> max. 1 contact for 2-wire current signal with plug ISO 4400 as well as 2-wire current signal with IS-protection  
no contact possible with 3-wire in combination with plug ISO 4400

Analogue output (optionally) / Supply	
2-wire current signal	4 ... 20 mA / V <sub>S</sub> = 13 ... 36 V <sub>DC</sub> permissible load: R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S min</sub> ) / 0.02 A] Ω      response time: < 10 msec
2-wire current signal with IS-protection	4 ... 20 mA / V <sub>S</sub> = 13 ... 28 V <sub>DC</sub> permissible load: R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S min</sub> ) / 0.02 A] Ω      response time: < 10 msec
3-wire current signal	4 ... 20 mA / V <sub>S</sub> = 19 ... 30 V <sub>DC</sub> adjustable (turn-down of span 1:5) <sup>4</sup> permissible load: R <sub>max</sub> = 500 Ω      response time: < 3 sec
3-wire voltage signal	0 ... 10 V / V <sub>S</sub> = 15 ... 36 V <sub>DC</sub> permissible load: R <sub>min</sub> = 10 kΩ      response time: < 3 msec
without analogue output	V <sub>S</sub> = 15 ... 36 V <sub>DC</sub>
Accuracy <sup>3</sup>	standard: P <sub>N</sub> < 0.4 bar: ≤ ± 0.5 % FSO;      P <sub>N</sub> ≥ 0.4 bar: ≤ ± 0.35 % FSO option: P <sub>N</sub> ≥ 0.4 bar: ≤ ± 0.25 % FSO

<sup>3</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

<sup>4</sup> with turn-down of span the analogue signal is adjusted automatically to the new measuring range

Thermal effects (Offset and Span)			
Nominal pressure P <sub>N</sub>	[bar]	-1 ... 0	< 0.40      ≥ 0.40
Tolerance band	[% FSO]	≤ ± 0.75	≤ ± 1      ≤ ± 0.75
in compensated range	[°C]	-20 ... 85	0 ... 70      -20 ... 85

Permissible temperatures			
Permissible temperatures	medium: -40 ... 125 °C	electronics / environment: -40 ... 85 °C	storage: -40 ... 100 °C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
Vibration	10 g RMS (25 ... 2000 Hz)      according to DIN EN 60068-2-6
Shock	500 g / 1 msec      according to DIN EN 60068-2-27

Materials	
Pressure port	stainless steel 1.4404 (316 L)
Housing	stainless steel 1.4404 (316 L)
Display housing	PA 6.6, polycarbonate
Seals (media wetted)	standard: FKM      option: NBR; welded version <sup>5</sup> others on request
Diaphragm	stainless steel 1.4435 (316 L)
Media wetted parts	pressure port, seals, diaphragm

<sup>5</sup> welded version only for pressure ports according to EN 837; possible for nominal pressure ranges P<sub>N</sub> ≤ 40 bar

# DS 200

Electronic Pressure Switch

Technical Data



Explosion protection (only for 4 ... 20 mA / 2-wire)						
Approval AX14-DS 200	IBExU 06 ATEX 1050 X zone 1: II 2G Ex ia IIC T4 Gb (connector) / II 2G Ex ia IIB T4 Gb (cable)					
Safety technical maximum values	$U_i = 28 \text{ V}$ , $I_i = 93 \text{ mA}$ , $P_i = 660 \text{ mW}$ , $C \approx 0 \text{ nF}$ , $L_i \approx 0 \text{ }\mu\text{H}$					
Max. switching current <sup>6</sup>	70 mA					
Permissible temperatures for environment	-25 ... 70 °C					
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 100 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$					
<sup>6</sup> the real switching current in the application depends on the power supply unit						
Miscellaneous						
Display	4-digit, red 7-segment-LED display, digit height 7 mm, range of indication -1999 ... +9999; accuracy 0.1 % $\pm$ 1 digit; digital damping 0.3 ... 30 sec (programmable); measured value update 0.0 ... 10 sec (programmable)					
Current consumption (without contacts)	2-wire signal output current: max. 25 mA 3-wire signal output current: approx. 45 mA + signal current 3-wire signal output voltage: approx. 45 mA					
Ingress protection	IP 65					
Installation position	any <sup>7</sup>					
Weight	min. 160 g (depending on mechanical connection)					
Operational life	> 100 x 10 <sup>6</sup> cycles					
CE-conformity	EMC Directive: 2004/108/EC			Pressure Equipment Directive: 97/23/EC (module A) <sup>8</sup>		
<sup>7</sup> Pressure switches are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviation in the zero point for pressure ranges $P_N \leq 1 \text{ bar}$ .						
<sup>8</sup> This directive is only valid for devices with maximum permissible overpressure > 200 bar						
Wiring diagrams						
<p>2-wire-system (current)</p>			<p>3-wire-system (current / voltage)</p>			
Pin configuration						
Electrical connection	M12x1 plastic (5-pin)	M12x1 metal (5-pin)	M12x1 plastic (8-pin)	ISO 4400	Binder series 723 (5-pin)	cable colours (DIN 47100)
Supply +	1	1	1	1	3	wh (white)
Supply -	3	3	3	2	4	bn (brown)
Signal + (only 3-wire)	2	2	2	3	5	gn (green)
Contact 1	4	4	4	3	2	gy (grey)
Contact 2	5	5	5	-	1	pk (pink)
Contact 3	-	-	6	-	-	-
Contact 4	-	-	7	-	-	-
Shield	via pressure port	plug housing/ pressure port	via pressure port	ground contact	pressure port	ye/gn (yellow/green)
Electrical connections (dimensions in mm)						
<sup>9</sup> different cable types and lengths available; standard: 2 m PVC cable (without ventilation tube, permissible temperature: -5 ... 70 °C)						

# DS 200

Electronic Pressure Switch


Technical Data

## Mechanical connections (dimensions in mm)

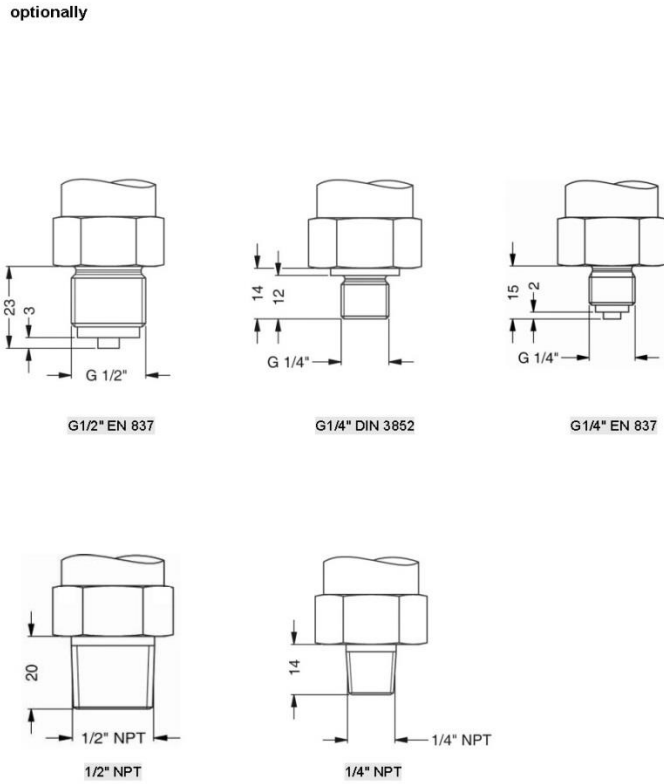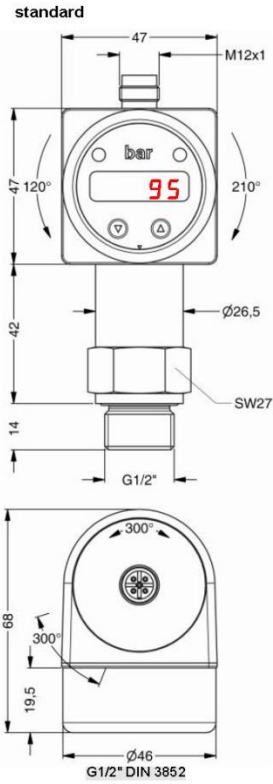

⇒ for nominal pressure  $P_N > 400$  bar increases the length of devices without IS-version by 19 mm and of devices with IS-version by 39 mm

### optionally for $P_N$ from 0.1 up to 40 bar

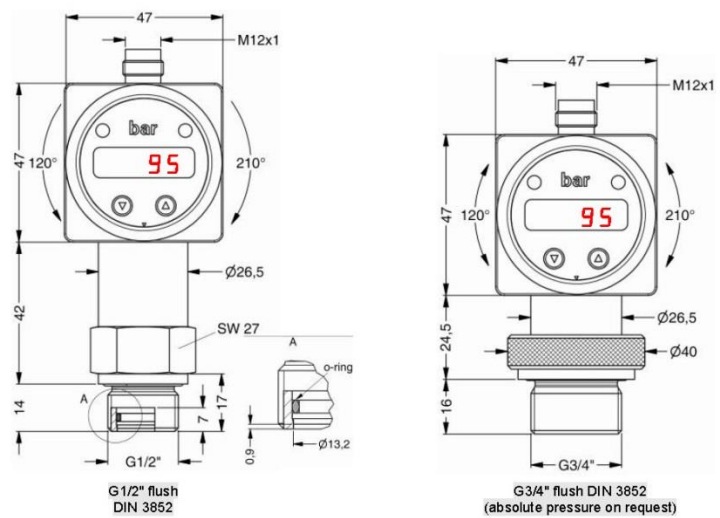

⇒ metric threads and other versions on request

## Ordering code DS 200

DS 200		□ □ □ □ - □ □ □ □ - □ □ □ □ - □ □ □ □ - □ □ □ □
<b>Pressure</b>		
gauge in bar	1	7 8 0
gauge in mH <sub>2</sub> O	1	7 8 H
absolute in bar	1	7 8 1
<b>Input</b>		
[mH <sub>2</sub> O]	[bar]	
1	0.10	1 0 0 0
1.6	0.16	1 6 0 0
2.5	0.25	2 5 0 0
4	0.40	4 0 0 0
6	0.60	6 0 0 0
10	1.0	1 0 0 1
16	1.6	1 6 0 1
25	2.5	2 5 0 1
40	4.0	4 0 0 1
60	6.0	6 0 0 1
100	10	1 0 0 2
160	16	1 6 0 2
250	25	2 5 0 2
400	40	4 0 0 2
600	60	6 0 0 2
100	100	1 0 0 3
160	160	1 6 0 3
250	250	2 5 0 3
400	400	4 0 0 3
600	600	6 0 0 3
-1 ... 0	customer	X 1 0 2
customer		9 9 9 9
<b>Analogue output</b>		
without		0
4 ... 20 mA / 2-wire		1
0 ... 10 V / 3-wire		3
4 ... 20 mA / 3-wire, adjustable		7
Intrinsic safety 4 ... 20 mA / 2-wire		E
customer		9
<b>Contact</b>		
1 contact	<sup>2,3</sup>	1
2 contacts	<sup>2,3</sup>	2
4 contacts	<sup>4</sup>	4
<b>Accuracy</b>		
standard for P <sub>N</sub> > 0,4 bar	0.35 %	3
standard for P <sub>N</sub> ≤ 0,4 bar	0.5 %	5
option for P <sub>N</sub> ≥ 0,4 bar	0.25 %	2
customer		9
<b>Electrical connection</b>		
Male plug M12x1 (5-pin) / plastic version		N 0 1
Male plug M12x1 (8-pin) / plastic version		M 5 0
Male plug M12x1 (5-pin) / metal version		N 1 1
Male and female plug ISO 4400		1 0 0
Male plug Binder series 723 (5-pin)		2 0 2
Cable outlet incl. cable		T A 0
customer		9 9 9
<b>Mechanical connection</b>		
G1/2" DIN 3852		1 0 0
G1/2" EN 837		2 0 0
G1/4" DIN 3852		3 0 0
G1/4" EN 837		4 0 0
G1/2" DIN 3852 with flush sensor		F 0 0
G3/4" DIN 3852 with flush sensor		K 0 0
1/2" NPT		N 0 0
1/4" NPT		N 4 0
customer		9 9 9
<b>Seals</b>		
FKM		1
without (welded version)		2
NBR		5
customer		9
<b>Special version</b>		
standard		0 0 0
customer		9 9 9

<sup>1</sup> from 60 bar: measurement starts with ambient pressure

<sup>2</sup> with Ex version max. 1 contact is possible

<sup>3</sup> with connector ISO 4400 and output 2-wire version only max. 1 contact possible; with 3-wire version no contact possible

<sup>4</sup> 4 contacts and M12x1, 8-pin only possible in combination and together with 4 ... 20 mA/3-wire; 0 ... 10 V/3-wire on request

<sup>5</sup> standard: 2 m PVC cable without ventilation tube, others on request

<sup>6</sup> not possible for nominal pressure P<sub>N</sub> > 40 bar; also not possible for vacuum ranges; for G3/4" flush nominal pressure abs. on request

<sup>7</sup> welded version only with pressure ports according to EN 837; possible for nominal pressure ranges P<sub>N</sub> ≤ 40 bar