

TECHNICAL DATA

PRESSURE TEMPERATURE LEVEL FLOW



LMP 331

Screw-In Transmitter

Stainless Steel Sensor

standard: 0.35 % FSO option: 0.25 % / 0.1 % FSO

Nominal pressure

from 0 ... 100 mbar up to 0 ... 40 bar

Output signals

2-wire: 4 ... 20 mA 3-wire: 0 ... 20 mA / 0 ... 10 V others on request

Special characteristics

- pressure port G 3/4" flush
- excellent accuracy
- small thermal effect
- excellent long term stability

Optional versions

- accuracy 0.1% FSO IEC 60770
- IS-version: Ex ia = intrinsically safe for gases and dusts
- SIL 2 application according to IEC 61508 / IEC 61511
- different electrical connections
- customer specific versions e. g. special pressure ranges

The screw-in transmitter LMP 331 has been designed for continuous level measurement and is characterized by an excellent performance and a robust construction. The modular construction allows the user the highest possible flexibility in the adaption of LMP 331.

Optional features like e.g. an intrinsically safe version or a functionally safe version (SIL 2) increase the advantages when launching and realizing projects for plants and systems.

Preferred areas of use are



Plant and Machine Engineering



Energy Industry



Environmental Engineering (water - sewage - recycling)













Stainless Steel Screw-In Transmitter

Input pressure range															
Nominal pressure gauge	[bar]	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6	10	16	25	40
Level	[mH ₂ O]	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400
Overpressure	[bar]	0.5	1	1	2	5	5	10	10	20	40	40	80	80	105
Burst pressure ≥	[bar]	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50	50	120	120	210
Vacuum resistance		$P_N \ge 1$ bar: unlimited vacuum resistance $P_N < 1$ bar: on request													

Output signal / Supply							
Standard	2-wire: 4 20 mA / V _S = 8 32 V _{DC}						
Option IS-version	2-wire: 4 20 mA / V _S = 10 28 V _{DC}						
Options 3-wire	3-wire: 0 20 mA / V _S = 14 30 V _{DC}						
	0 10 V / V _S = 14 30 V _{DC}						
Performance							
Accuracy1	standard: nominal pressure < 0.4 bar: ≤ ± 0.5 % FSO						
	nominal pressure ≥ 0.4 bar: ≤ ± 0.35 % FSO						
	option 1: nominal pressure ≥ 0.4 bar: ≤ ± 0.25 % FSO						
Permissible load	option 2: for all nominal pressures: $\leq \pm 0.1 \%$ FSO current 2-wire: $R_{max} = \Gamma(V_S - V_{S,min}) / 0.02$ Al Ω						
Permissible load	current 2-wire: $R_{max} = [(V_S - V_{S min}) / 0.02 \text{ A}] \Omega$ current 3-wire: $R_{max} = 500 \Omega$						
	voltage 3-wire: $R_{min} = 10 \text{ k}\Omega$						
Influence effects	supply: 0.05 % FSO / 10 V						
	load: 0.05 % FSO / kΩ						
Long term stability	≤ ± 0.1 % FSO / year at reference conditions						
Response time 2							
1	3-Leiter: ≤ 3 msec						
accuracy according to IEC 60770 – Im with optional accuracy 0,1 % FSO the	nit point adjustment (non-linearity, hysteresis, repeatability) response time is 200 msec						
Thermal effects (Offset and Spa							
Nominal pressure P _N [bar		> 0.40					
Tolerance band [% FSO		≤±0.75					
in compensated range [°C	0 70	-20 85					
Permissible temperatures							
Permissible temperatures	medium: -40 125 °C						
	electronics / environment: -40 85 °C						
	storage: -40 100 °C						
Electrical protection							
Short-circuit protection	permanent						
Electromagnetic compatibility	erse polarity protection no damage, but also no function						
Mechanical stability	emission and immunity according to EN 61326						
Vibration	10 a BMS (25 2000 Hz) according to DI	VI EN 60069 2 6					
Shock							
Explosion protection (only for 4		V EIV 00000 Z Z/					
Approvals	IBEXU 10 ATEX 1068 X						
DX19-LMP 331	zone 0: II 1G Ex ia IIC T4 Ga						
	zone 20: II 1D Ex ia IIIC T 85°C Da						
Safety technical maximum values	$U_i = 28 \text{ V}, I_i = 93 \text{ mA}, P_i = 660 \text{ mW}, C_i \approx 0 \text{nF}, L_i \approx 0 \mu$						
	the supply connections have an inner capacity of max. 27 nF opposite the housing						
Permissible temperature for	in zone 0: -20 60 °C with p _{atm} 0.8 bar b	s 1.1 bar					
medium Conneting cables	in zone 1 or higher: -20 70 °C cable capacitance: signal line/shield also signal line	/ signal line: 160 pF/m					
(by factory)	cable inductance: signal line/shield also signal line						
Materials	1	· ·					
Pressure port	stainless steel 1.4404 (316L)						
Housing	stainless steel 1.4404 (316L)						
Seals	standard: FKM						
	option: EPDM						
	NBR						
Diophragm	others on request						
Diaphragm Media wetted parts	stainless steel 1.4435 (316L)						
Media wetted parts	pressure port, seals, diaphragm						



Stainless Steel Screw-In Transmitter


Miscellaneous		
Optionally SIL 2 application	according to IEC 61508 / IEC 61511	
Current consumption	signal output current: max. 25 mA	signal output voltage: max. 7 mA
Weight	approx. 200 g	
Installation position	any ³	
Operational life	> 100 x 10 ⁶ cycles	
CE-conformity	EMC Directive: 2004/108/EC	
ATEX Directive	94/4/EG	


³ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviation in the zero point for pressure ranges P_N ≤ 1 bar.

Pin configuration


1 III comigaration						
Electrical connections	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	field housing	cable colours (DIN 47100)	
Supply +	1	3	1	IN +	wh (white)	
Supply –	2	4	2	IN –	bn (brown)	
Signal + (only for 3-wire)	3	1	3	OUT +	gn (green)	
Shield	ground pin	5	4		ve/an(vellow/areen)	

Wiring diagrams






Electrical connections (dimensions in mm)

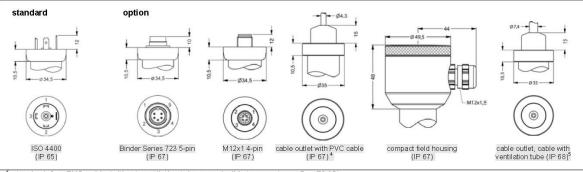

 $^{^4}$ standard: 2 m PVC cable (without vertilation tube, permissible temperature: -5 ... 70 °C) 5 different cable types and lengths available, permissible temperature depends on kind of cable

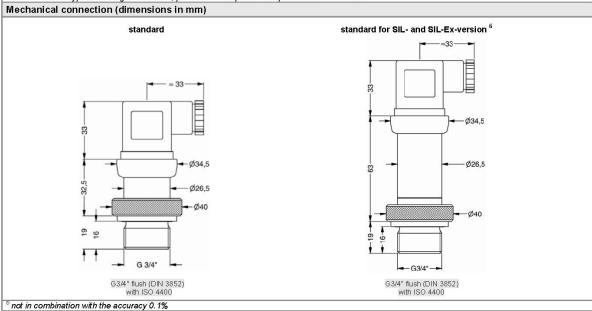



Ordering code LMP 331 **LMP 331** Pressure 4 3 0 4 3 1 in bar in mH₂O 1 1.6 0.10 0.16 0.25 0.40 6 0.60 1.0 10 16 1.6 25 2.5 40 4.0 60 6.0 100 10 160 250 16 25 400 40 customer Pressure port Stainless steel 1.4404 (316L) consult Diaphragm Stainless steel 1.4435 (316L) customer consult Output 4 ... 20 mA / 2-wire 0 ... 20 mA / 3-wire 1 2 3 E 1S 0 ... 10 V / 3-wire Intrinsic safety 4 ... 20 mA / 2-wire SIL2 4 ... 20 mA / 2-wire SIL2 with Intrinsic safety ES 4 ... 20 mA / 2-wire customer 9 consult FKM EPDM NBR 5 consult 1 0 0 2 0 0 T A 0 T R 0 M 1 0 Male and female plug ISO 4400 Male plug Binder series 723 (5-pin) Cable outlet with PVC cable Cable outlet ² Male plug M12x1 (4-pin) / metal Compact field housing 8 5 0 stainless steel 1.4305 9 9 9 consult customer standard for $P_N \ge 0.4$ bar standard for $P_N \le 0.4$ bar option 1 for $P_N \ge 0.4$ bar 0.35 % 0.5 % 0.25 % 5 option 2 0.1 % customer 9 consult Special version 0 0 0 9 9 9 standard consult



¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C), others on request

² cable with ventilation tube (code TR0 = PVC cable), different cable types and lengths available, price without cable

³ not in combination with SIL