



PA 430

Plug-on Display
for current loop
with Contacts

Functional range

- ▶ free scalable display
- ▶ switch mode, hysteresis, parameterizable deceleration of the contacts
- ▶ display 330 ° rotatable
- ▶ connector 300 ° rotatable
- ▶ no external power supply necessary

Product characteristics

- ▶ plug-on display for pressure transmitter with output signal: 4 ... 20 mA / 2-wire or 0 ... 10 V / 3-wire
- ▶ 4-digit LED display


Optional versions

- ▶ IS-version
- ▶ 1 or 2 programmable contacts

Typical application



in situ display of pressure, temperature and level

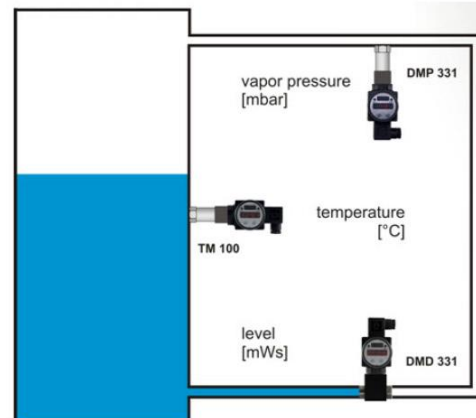

PA 430


Plug-on Display

Technical Data

Analogue signal				
2-wire-system	2-wire: 4 ... 20 mA			
Option Ex-protection	2-wire: 4 ... 20 mA			
3-wire-system	0 ... 10 V			
Supply				
2-wire-system	supplied by current loop; voltage drop ≤ 6 V; $V_S = (V_{T \min} \dots V_{T \max}) + 6 V_{DC}$ with V_T = supply of the used transmitter			
	Ex-protection: max. $28 V_{DC}$ (for combination of transmitter and PA 430)			
3-wire-system	display is supplied parallel with transmitter $V_{S \min} = 8 V_{DC} \dots V_{T \min}$; $V_{S \max} = V_{T \max} \dots 36 V_{DC}$ with V_T = supply of the used transmitter			
Contact (optionally)¹				
Number, type	max. 2 independent PNP open collector contacts			
Switching performance	$V_{Switch} = V_S - 2$ V; contact rating max. 125 mA, short-circuit resistant			
Repeatability	$\leq \pm 0.1$ % FSO			
Switching frequency	max. 10 Hz			
Switching cycles	$> 100 \times 10^6$			
Delay time	0 ... 100 sec			
¹ max. 1 contact for: 4 ... 20 mA / 2-wire with plug ISO 4400; 0 ... 10 V / 3-wire with Binder 723 (5-pin) or M12x1; Ex-protection no contact possible with 0 ... 10 V / 3-wire with plug ISO 4400				
Miscellaneous				
Electrical protection	reverse polarity protection (no damage, but also no function); electromagnetic compatibility (emission and immunity according to EN 61326); short-circuit protection; ingress protection IP 65			
Display	4-digit, 7-segment red LED display, digit height 7 mm; range of indication -1999 ... +9999; accuracy $0.1 \% \pm 1$ digit; digital damping 0.3 ... 30 sec (programmable); measured value update 0.0 ... 10 sec (programmable)			
Permissible temperatures	electronics / environment: -25 ... 85 °C storage: -40 ... 85 °C			
Material of display housing	PA 6.6, polycarbonate			
Mechanical stability	vibration: 5 g RMS (20 ... 2000 Hz) shock: 100 g / 11 msec			
Explosion protection (optionally for 4 ... 20 mA / 2-wire)				
Approval AX14-PA 430	IBExU 06 ATEX 1050 X zone 1: II 2G Ex ia IIC T4 Gb			
Safety techn. maximum values	$U_i = 28$ V, $I_i = 93$ mA, $P_i = 660$ mW, $C \approx 0$ nF, $L_i \approx 0$ μ H; max. switching current ⁴ : 70 mA			
Permissible temperatures for environment	-25 ... 70 °C			
⁴ the real switching current in the application depends on the power supply unit				
Wirings diagrams				
Pin configuration				
Electrical connection	ISO 4400	M12x1 metal (5-pin)	Binder 723 (5-pin)	Binder 723 (7-pin) ³
Supply +	1	1	3	3
Supply -	2	2	4	1
Signal + (for 3-wire)	3 ¹	3 ¹	1 ¹	-
Contact 1	3 ¹	5	2	-
Contact 2	-	3 ¹	1 ¹	-
Shield	ground pin	4	5	2
³ intended for usage with DMP 331i, DMP 333i and LMP 333i with el. connection Binder Series 723 (7-pin); Pins 4, 5, 6, 7 are wired through 1:1; standard without contacts; contacts on request; 3-wire version not possible				
Dimensions (in mm)				

Ordering code PA 430

PA 430



Standard version														
			8	5	0									
Analogue output														
	4 ... 20 mA / 2-wire					1								
	0 ... 10 V / 3-wire					3								
	Intrinsic safety for zone 1 / 4 ... 20 mA / 2-wire					E								
	customer					9								consult
Contact ¹														
	without contact					0								
	1 contact					1								
	2 contacts					2								
Electrical connection (output)														
	Male plug ISO 4400					1	0	0						
	Male plug Binder series 723 (5-pin)					2	0	0						
	Male plug Binder series 723 (7-pin) ²					A	0	1						
	M12x1 (5-pin) / metal version					N	1	0						
Electrical connection (input)														
	Male plug ISO 4400						1	0	0					
	Male plug Binder series 723 (5-pin)						2	0	0					
	Male plug Binder series 723 (7-pin)						A	0	1					
	Male plug M12x1 (5-pin) / metal version						N	1	0					
Unit														
	without ³								0					
	bar								1					
	mbar								2					
	mH ₂ O								3					
	%								P					
	mA								A					
	customer								9					consult
Label on display														
	standard								1					
	neutral								N					
	customer								9					consult
Special version														
	standard									0	0	0		
	customer									9	9	9		consult

¹ max. 1 contact for: 4 ... 20 mA / 2-wire with plug ISO 4400; 0 ... 10 V / 3-wire with Binder 723 (5-pin) or M12x1 (5-pin); Ex-protection no contact possible with 0 ... 10 V / 3-wire with plug ISO 4400

² intended for the use with DMP 331i, DMP 333i and LMP 331i with el. connection Binder Serie 723 (7-pin)

³ the unit signs are loose-settled